

PCYC Pump Out Guide

How to use the dockside pump-out system at the club.

What a connected system will look like

Pump out nozzle (shown as closed)

Dockside Valves (shown as OPEN)



STEP 1

Retrieve the hose cart from the shed. You'll need the 5 gallon bucket, bleach and some disposable gloves.




STEP 2

Take the hose off the cart. Leaving the hose on the cart may result in the entire cart being pulled off the dock as you bring the hose onto your boat.



STEP 3

Put the proper adapter in place. There are two black rubber adapters, one metric, one standard. There's also an inverted yellow suction cup in case the adapters don't fit.

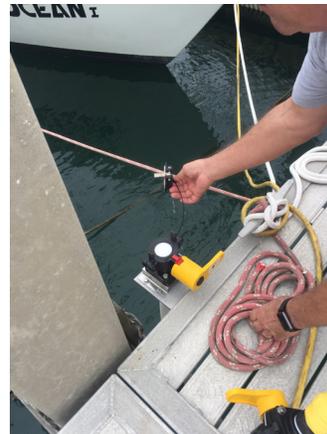

STEP 4

Take the cap off of the dockside valve connection. The 'wings' on the connector will face UP.




STEP 5

After removing the cap, lower the hose onto the dockside valve. Snap retaining clips to secure the units together.




STEP 6

Place suction nozzle onto the adapter and snap on the retaining clips to secure the nozzle and adapter.

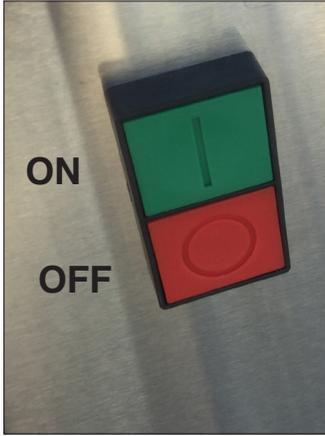

STEP 7

Turn on the pump. There is a timer on the pump (13 minutes). You can turn on the pump before step 1, if you can complete your pumping and cleaning in time.

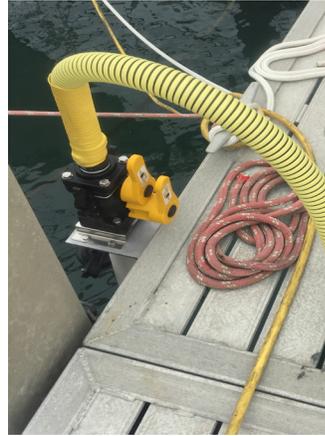

STEP 8

Turn on the two dockside valves. In open position they will be vertical, as shown.



STEP 9

You're ready to pump out. Rotate the nozzle valve to be in-line with the hose, as shown. You can see waste in the clear chamber. Run till dry. Shut off valve and flush your head a few times and repeat pump out.



STEP 10

Shut off nozzle valve, unclip from adapter. Lift off nozzle, rotate as shown to avoid dripage.



STEP 11

Add water to the bleach to fill the bucket. Rinse off adapter and place it back on its holder on the cart.



STEP 12

Place suction nozzle into the bucket of water and turn on the valve. All the water will be quickly sucked out of the bucket. Shut off valve.



STEP 13

Shut off valves at dockside connection. Detach hose connection at base and replace the cap on the dockside base.



STEP 14

Spool hose back onto cart and return to the shed. Turn off pump if still running,